




CATALOGUE  
**CUTTING SOLUTIONS**

The widest range of cutting machinery to cover all cutting needs at the Sign market

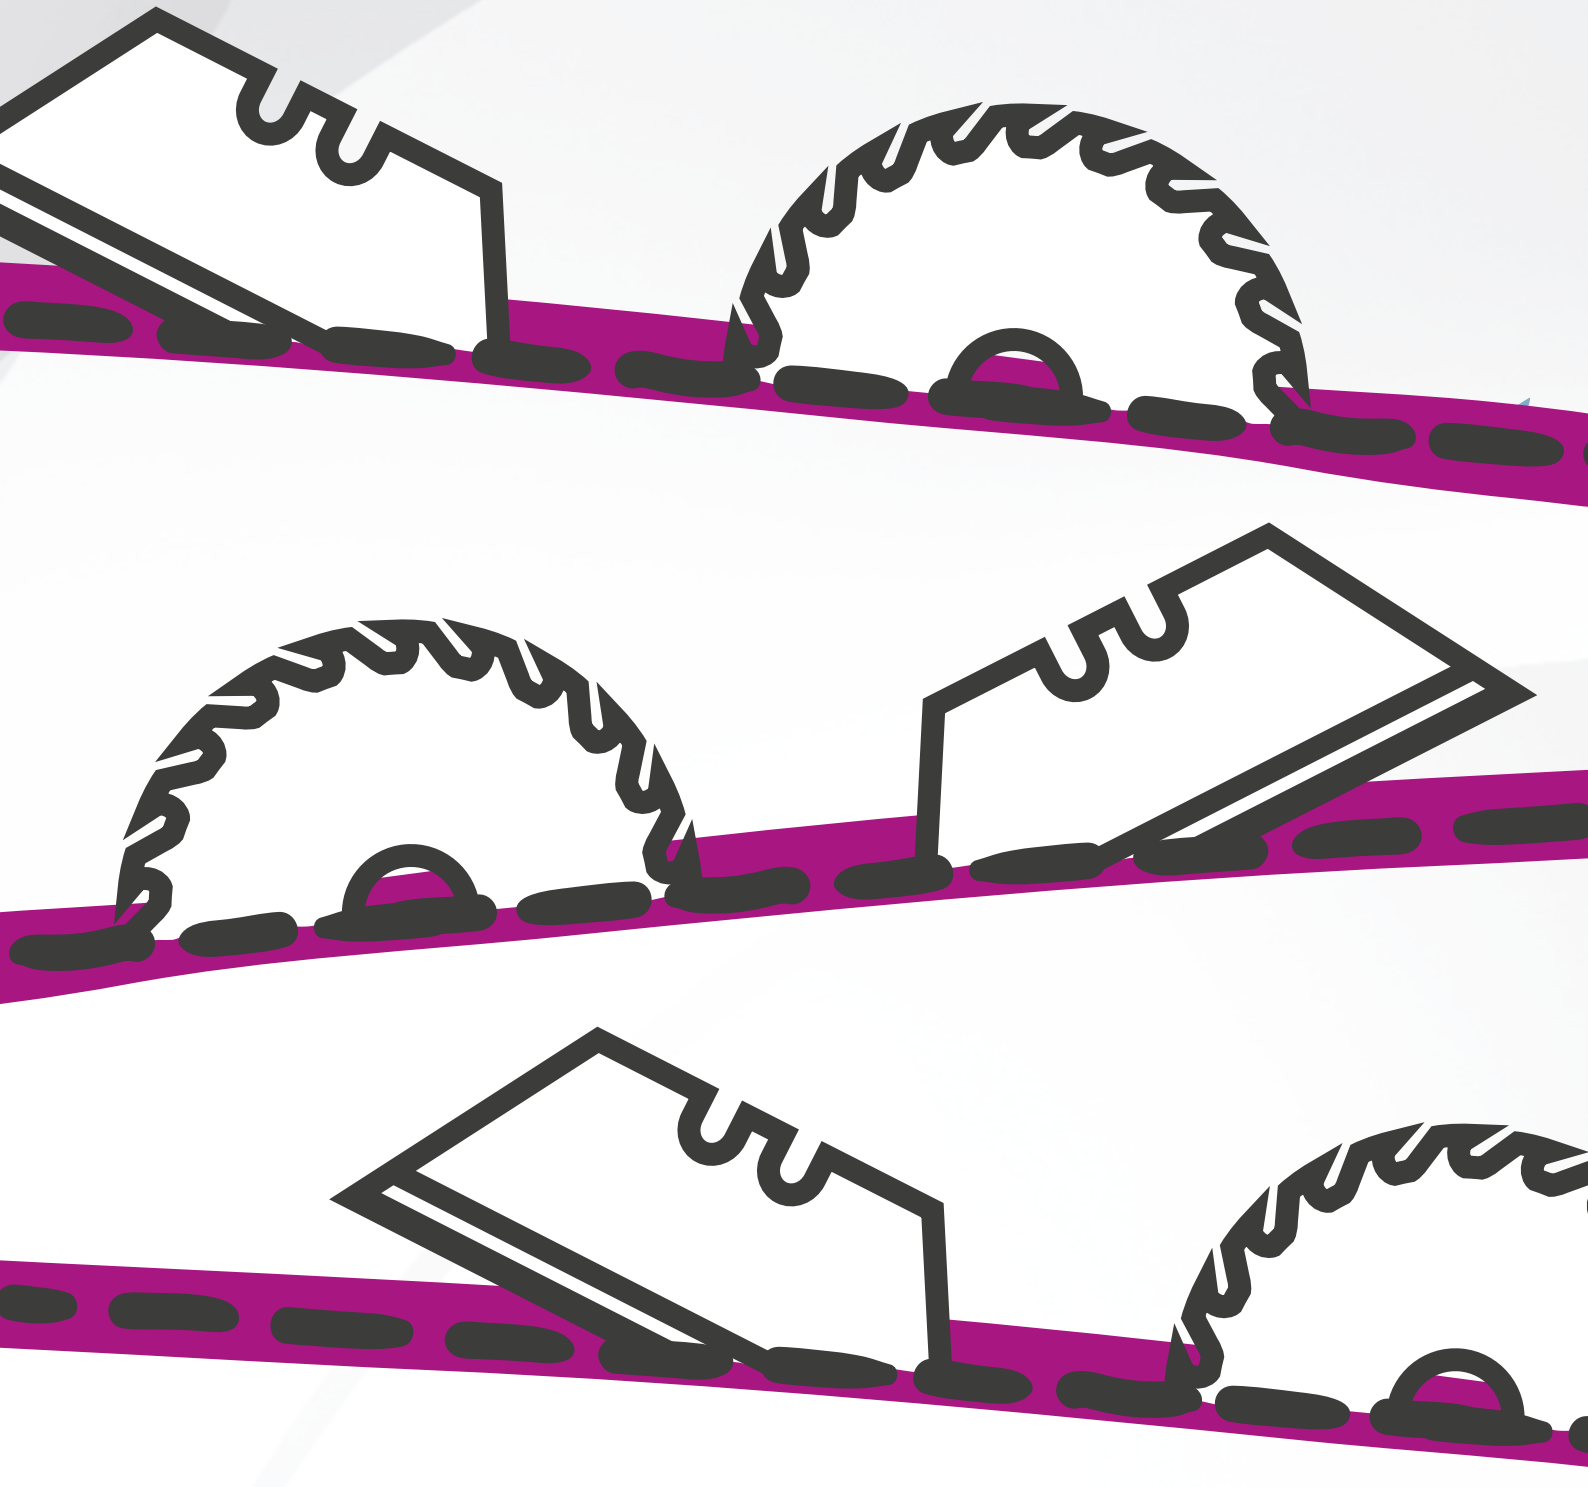

# INDEX

## Vertical Cutters

Verdi Basic Vertical Saw.....	4
Verdi Twin Vertical Saw and Cutter 2 in 1 .....	6
Wincut Pneumatic Vertical Cutter.....	8
Inblade Pneumatic / Manual Vertical Cutter .....	10
Inblade Pro Pneumatic Vertical Cutter .....	12

## Cutter Bars

Inbest Basic Cutter Bar.....	14
Inbest Twin Cutter Bar .....	16
Inbest Pro Cutter Bar .....	18

Compressors & Dust Collectors .....	20
-------------------------------------	----

Compare Cutter Machines.....	22
------------------------------	----



#### ENTER OUR WEBSITE, [www.ingletmachinery.com](http://www.ingletmachinery.com)

Where you can find all our products, news, offers and promotions with photographs and detailed descriptions... Navigate in a comfortable and easy way through the different sections or simply type in the search engine the product you want to find.



#### BUY IN OUR ONLINE SHOP

Register for more agility in the management of your orders.  
Register on our website and get exclusive promotions!



#### CONSTANT INNOVATION

We present this selection of products with interesting novelties. Here you will find cutting-edge solutions to make your work easier.



#### PROFESSIONALS AT YOUR SERVICE

The customer is our raison d'être. At inglet you will find personalised attention to advise you and provide you with the solutions that best suit your needs.  
Tel. 973 312 312 312, Fax 973 310 755, E-mail: [comercial@inglet.com](mailto:comercial@inglet.com)



#### KEEP YOUR MACHINERY UP TO DATE

We are prepared to offer you a great team that will provide you with the best technical service. Do not hesitate to contact us for any enquiry. We will be pleased to help you.




#### IMMEDIATE DELIVERY

The inglet dispatch centre becomes the customer's real warehouse. Quality and immediacy of delivery are always our main objectives.

## Verdi Basic Vertical Saw

Technical Information	72 85 10 Basic 122 cm	72 85 15 Basic 157 cm	72 85 32 Basic 210 cm	72 85 30 Basic 244 cm	72 85 40 Basic 305 cm
<b>Saw operation</b>	Semi-automatic	Semi-automatic	Electronic	Electronic	Electronic
<b>Saw advancement</b>	Manual	Manual	Automatic	Automatic	Automatic
<b>Speed control</b>	No	No	Yes	Yes	Yes
<b>Saw blade</b>	250 x 30 mm / Z80	250 x 30 mm / Z80	250 x 30 mm / Z80	250 x 30 mm / Z80	250 x 30 mm / Z80
<b>Max. cutting height</b>	122 cm / 48"	157 cm / 61"	210 cm / 82,7"	244 cm / 96"	305 cm / 120"
<b>Engine power</b>	1,5 hp	1,5 hp	1,5 hp	1,5 hp	1,5 hp
<b>Engine speed</b>	2700 RPM	2700 RPM	2700 RPM	2700 RPM	2700 RPM
<b>Voltage</b>	220 V / 110 V	220 V / 110 V	220 V / 110 V	220 V / 110 V	220 V / 110 V
<b>Dimensions</b>	212 x 250 x 50 cm	242 x 250 x 50 cm	298 x 250 x 50 cm	345 x 250 x 50 cm	395 x 250 x 50 cm
<b>Weight</b>	125 Kg / 276 lb	145 Kg / 319 lb	162 Kg / 357 lb	178 Kg / 393 lb	205 Kg / 452 lb
<b>Shipping dimensions A</b>	260 x 70 x 62 cm	260 x 70 x 62 cm	410 x 70 x 62 cm	410 x 70 x 62 cm	410 x 70 x 62 cm
<b>Shipping weight A</b>	137 Kg	149 Kg	172 Kg	184 Kg	201 Kg
<b>Shipping dimensions B</b>	161 x 131 x 13 cm	195 x 131 x 13 cm	197 x 132 x 13 cm	197 x 140 x 13 cm	197 x 160,5 x 13 cm
<b>Shipping weight B</b>	42 Kg	52 Kg	63 Kg	68 Kg	80 Kg




### Cutting head with Saw Blade

#### Cut:

PVC foamboard  
Aluminium composite / Dibond®  
Aluminium sheets / ChromaLuxe®  
Acrylics / Plexiglas®  
MDF / Wood  
Corrugated plastic

Cutting stoppers on each side

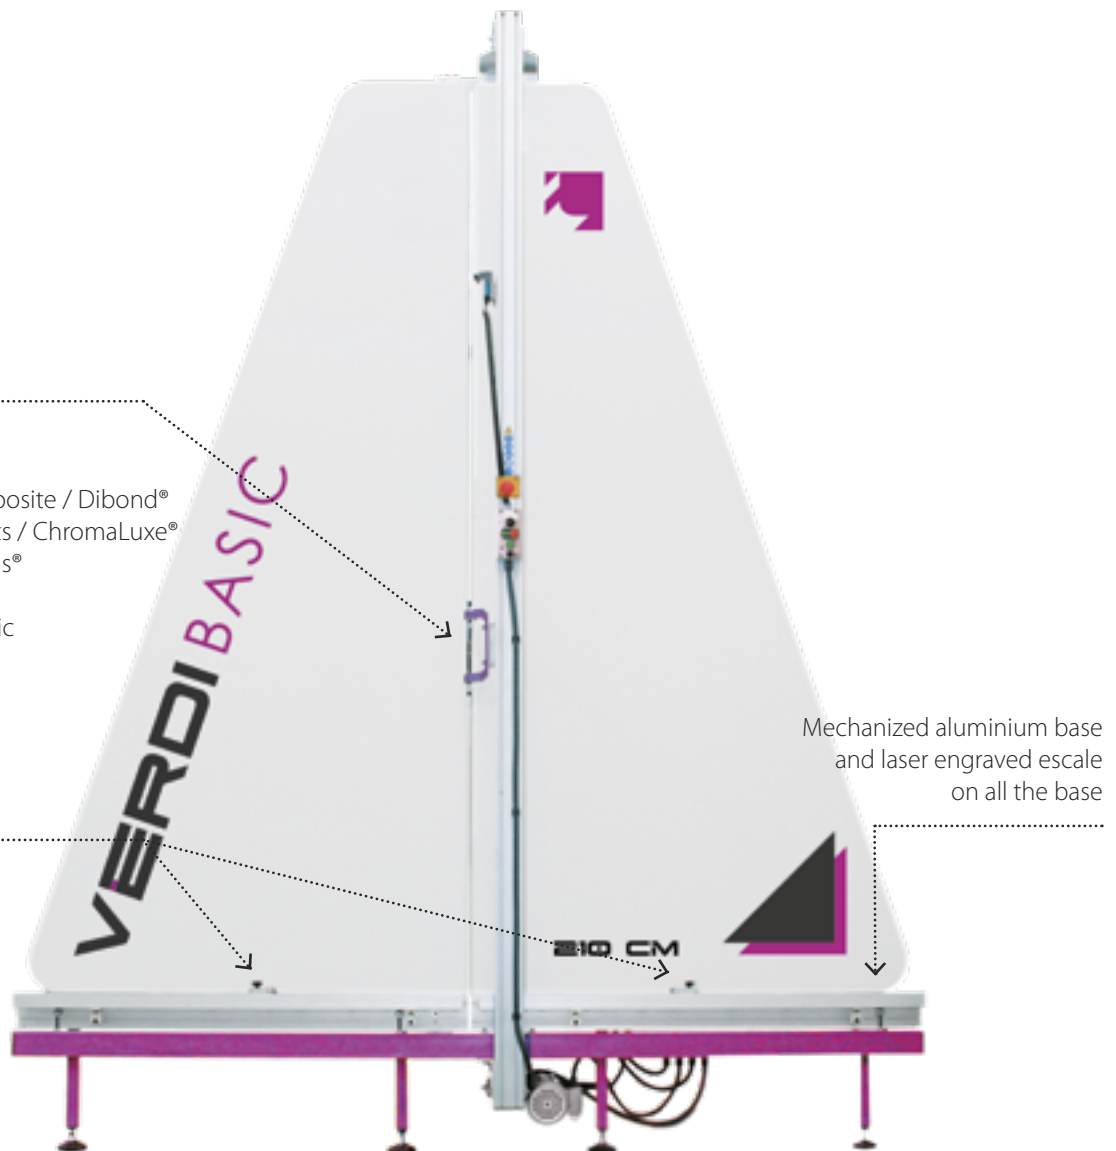

Mechanized aluminium base and laser engraved escale on all the base

**The Verdi Basic vertical saw is designed to cut any type of rigid material up to a height of 305 cm and a maximum thickness of 20 mm.** The easy-to-use mechanism, combined with its powerful engine, turn the machine into an essential vertical saw for any workshop.

**The Verdi Basic comes standard equipped with a universal saw.** This is guided by a robust and reliable linear bearing guide system that eliminates any vibration and guarantees a straight and perfect cut all the way through.

**It is available in 5 different sizes:** in the 122 cm (48") and 157 cm (61.8") models the blade is manually operated. In the 210 cm (82.7"), 244 cm (96.1") and 305 cm (120.1") models the movement is automatic via a belt-driven mechanism.

**Materials cut by the Verdi Basic vertical disc cutter:** PVC foamboard, Aluminium composite / Dibond®, Aluminium sheets / ChromaLuxe®, Acrylics / Plexiglas®, MDF / Wood or Corrugated plastic.

**A dust collector (02 12 06) is available as an accessory** for dust-free use of the machine.

**Safety use:** acrylic cover to protect the operator from the saw blade and to hold the material during the cut.

**Advancement speed regulator:** regulator to adjust the cutting speed of the saw blade depending on the material that needs to be cut. (only for models 210, 244 and 305).

**Adjustable limit switch:** allow the possibility to adjust the stop position of the saw blade, which is useful to cut small pieces without losing time.

**Reliability in use:** equipped with a mechanized aluminium base to guarantee a good support for the material, which is necessary to obtain a precise and square cut.

**Powerful 1.5 Hp engine:** silent and powerful engine to cut very rigid materials with no limitations.

**Other features:** saw blade automatically returns to the upper position after each cut. Two measurement stops to accurately set up the desired measure to get. Laser system available as an accessory, useful to indicate the cutting line. All models provided with adjustable legs system.




RIGIDS	Max. thickness	SEMI-RIGIDS	Max. thickness
PVC foamboard	20 mm	Corrugated plastic	20 mm
Aluminium composite / Dibond®	12 mm		
Aluminium sheets / ChromaLuxe®	3 mm		
Acrylics / Plexiglas®	12 mm		
MDF / Wood	20 mm		

ACCESSORIES	Basic 122	Basic 157	Basic 210	Basic 244	Basic 305
Pneumatic presser	14 20 20	14 20 21	14 20 22	14 20 23	14 20 24
Laser	14 20 06	14 20 06	14 20 06	14 20 06	14 20 06
1 m arm extension	14 20 02	14 20 02	14 20 02	14 20 02	14 20 02
Extra measure tab right	45 11 11	45 11 11	45 11 11	45 11 11	45 11 11
Extra measure tab left	45 11 75	45 11 75	45 11 75	45 11 75	45 11 75
Dust collector, 2 hp	02 12 06	02 12 06	02 12 06	02 12 06	02 12 06
Compressor, 1 Hp -6 l-	02 09 44	02 09 44	02 09 44	02 09 44	02 09 44
Compressor, 0.5 Hp -9 l-	02 09 38	02 09 38	02 09 38	02 09 38	02 09 38
Compressor, 1 Hp -24 l-	02 09 40	02 09 40	02 09 40	02 09 40	02 09 40
Compressor OS20P, 2 Hp -24 l-	02 09 24	02 09 24	02 09 24	02 09 24	02 09 24
Compressor L20, 2 Hp -24 l-	02 09 26	02 09 26	02 09 26	02 09 26	02 09 26
Universal saw blade	14 03 70	14 03 70	14 03 70	14 03 70	14 03 70
Saw blade for plastic	14 03 60	14 03 60	14 03 60	14 03 60	14 03 60
Saw blade for aluminium	14 03 22	14 03 22	14 03 22	14 03 22	14 03 22
Saw blade for wood	14 03 30	14 03 30	14 03 30	14 03 30	14 03 30

## Verdi Twin Vertical Saw and Cutter

Technical Information	72 85 50 Twin 122	72 85 51 Twin 157	728554 Twin 210	728552 Twin 244	728553 Twin 305
<b>Saw operation</b>	Semi-Automatic	Semi-Automatic	Electronic	Electronic	Electronic
<b>Blade operation</b>	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
<b>Speed head control</b>	No	No	Yes	Yes	Yes
<b>Saw blade</b>	250x30 mm / Z80	250x30 mm / Z80	250x30 mm / Z80	250x30 mm / Z80	250x30 mm / Z80
<b>Max cutting height</b>	122 cm / 48"	157 cm / 61"	210 cm / 82,7"	244 cm / 96"	305 cm / 120"
<b>Engine power</b>	1,5 hp	1,5 hp	1,5 hp	1,5 hp	1,5 hp
<b>Engine speed</b>	2700 RPM	2700 RPM	2700 RPM	2700 RPM	2700 RPM
<b>Voltage</b>	220 V / 110V	220 V / 110V	220 V / 110V	220 V / 110V	220 V / 110V
<b>Dimensions</b>	212 x 250 x 50 cm	242 x 250 x 50 cm	298 x 250 x 50 cm	345 x 250 x 50 cm	395 x 250 x 50 cm
<b>Weight</b>	138 Kg / 304 lb	161 Kg / 355 lb	186 Kg / 410 lb	203 Kg / 448 lb	233 Kg / 514 lb
<b>Shipping dimensions A</b>	260 x 70 x 62 cm	260 x 70 x 62 cm	410 x 70 x 62 cm	410 x 70 x 62 cm	410 x 70 x 62 cm
<b>Shipping A weight</b>	150 Kg	165 Kg	251 Kg	209 Kg	229 Kg
<b>Shipping dimensions B</b>	161 x 131 x 13 cm	195 x 131 x 13 cm	197 x 132 x 13 cm	197 x 140 x 13 cm	197 x 160,5 x 13 cm
<b>Shipping B weight</b>	42 Kg	52 Kg	63 Kg	68 Kg	80 Kg
<b>Shipping dimensions C</b>	58 x 58 x 92 cm	58 x 58 x 92 cm	58 x 58 x 92 cm	58 x 58 x 92 cm	58 x 58 x 92 cm
<b>Shipping C weight</b>	55 Kg	55 Kg	55 Kg	55 Kg	55 Kg

Pneumatic presser




**Cutting head with Saw Blade**

**On the left cuts:**

PVC Foamboard  
Aluminium composite / Dibond®  
Aluminium sheets / ChromaLuxe®  
Acrylics / Plexiglas®  
MDF / Wood

Cutting stoppers on each side

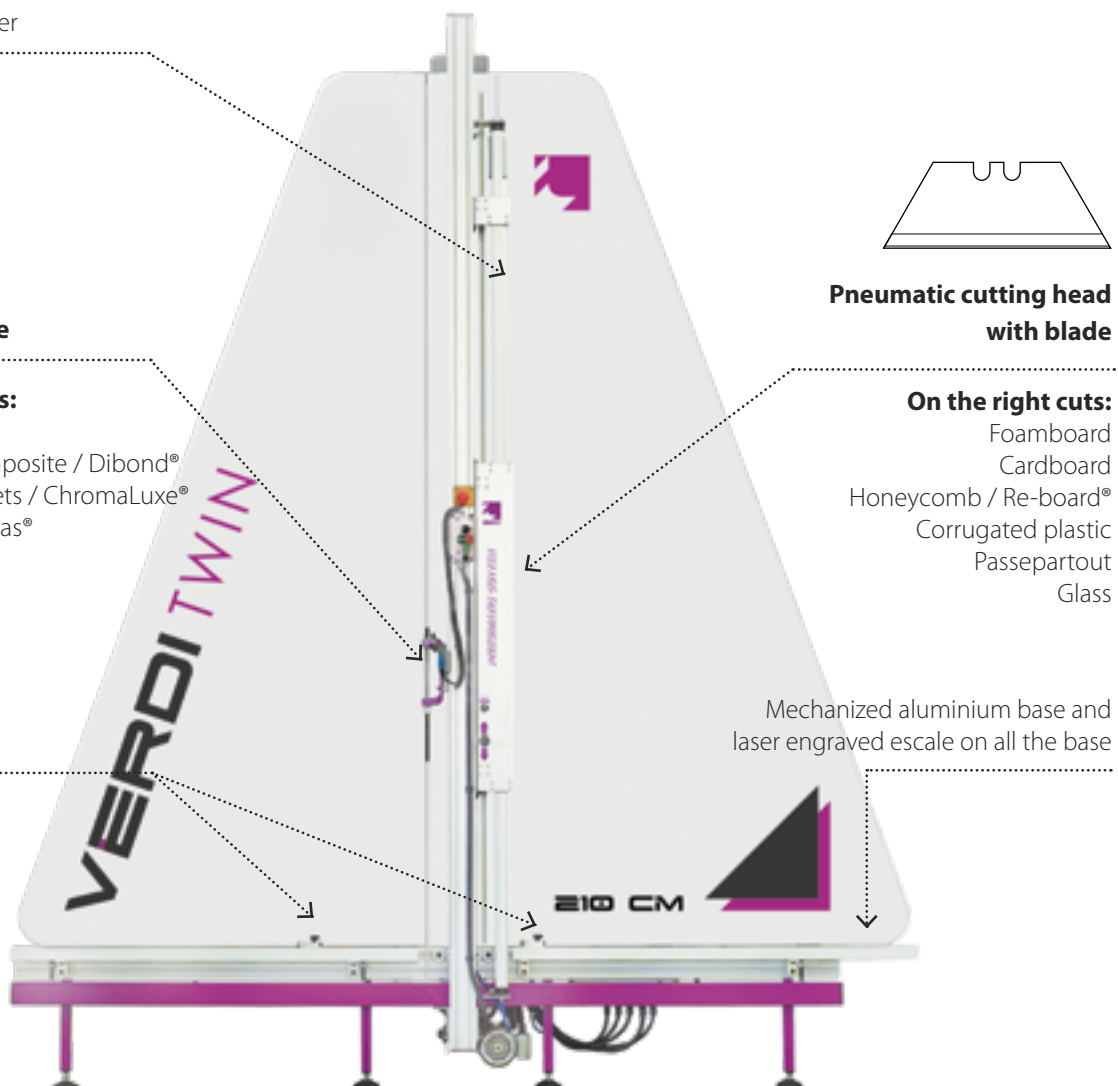

**Pneumatic cutting head with blade**

**On the right cuts:**

Foamboard  
Cardboard  
Honeycomb / Re-board®  
Corrugated plastic  
Passepartout  
Glass

Mechanized aluminium base and laser engraved escale on all the base

**The Verdi Twin vertical cutter is designed to cut any type of rigid and semi-rigid material up to a cutting height of 305 cm and a maximum thickness of 20 mm.** Its unique and complete features guarantee to cover quickly, accurately and smoothly any cutting requirement, from low volume needs to high production ones.

**The Verdi Twin is equipped with two cutting systems ready to use:** a saw blade on the left to cut rigid materials and a pneumatic knife on the right for semi-rigid ones. The movement of the saw blade is guided through a robust guide system that guarantees a perfect straight cut all along the way and the powerful engine guarantees an accurate result. The pneumatic movement of the knife offers an easy-to-use and fast solution to cut any semi-rigid material.

**The Verdi Twin is manufactured in 5 different sizes:** The saw blade is manually operated in models 122 cm (48") and 157 cm (61.8"); whereas in models 210 cm (82.7"), 244 cm (96.1") and 305 cm (120.1") the movement is automatically done through a belt-driven mechanism.

**Materials cut by the Verdi Twin:** PVC Foamboard, Aluminium composite / Dibond®, Aluminium sheets / ChromaLuxe®, Acrylics / Plexiglas®, MDF / Wood, Glass, Foamboard, Cardboard, Honeycomb / Reboard®, Corrugated plastic or Passepartout.

**All models come equipped with a powerful 2 HP dust collector** (02 12 06) to guarantee a dust-free operation.

**Forward speed controller:** regulator to adjust the cutting speed of the blade depending on the material to be cut. (Only for models 210, 244 and 305).

**Adjustable travel stop:** allows the possibility of adjusting the height where the blade should stop, very useful for cutting small pieces without wasting time.


**Powerful 1.5 hp motor:** silent and powerful motor to cut very rigid materials without limitations.

**Easy to use pneumatic switch:** pneumatic switch to quickly and easily activate the pneumatic cutter.

**Pneumatic clamping system:** fast system to hold the material and with the possibility of regulating the pressure if required.

**Reliability in use:** equipped with a mechanized aluminium base to guarantee a good support for the material, which is necessary to obtain a precise and square cut.

**Other features:** The blade automatically returns to the upper position after each cut. Transparent safety protector and cutting disc protector. Nylon wheels at the base for easy handling of large materials. Two measurement stops to set the desired measurement precisely. Laser available as accessory, useful to indicate the cutting line. All models equipped with adjustable legs.



<b>RIGIDS</b>	<b>Saw</b>	<b>Blade</b>	<b>SEMI-RIGIDS</b>	<b>Saw</b>	<b>Blade</b>
<b>PVC Foamboard</b>	20 mm	5 mm	<b>Foamboard</b>	-	20 mm
<b>Aluminium composite / Dibond®</b>	12 mm	-	<b>Cardboard</b>	-	20 mm
<b>Aluminium sheets / ChromaLuxe®</b>	3 mm	-	<b>Honeycomb / Re-board®</b>		20 mm
<b>Acrylics / Plexiglas®</b>	12 mm	-	<b>Corrugated plastic</b>	20 mm	5 mm
<b>MDF / Wood</b>	20 mm	-	<b>Passepartout</b>	-	4 mm
<b>Glass</b>	-	6 mm * / ♦			

\* Optional accessory required. Only for Verdi 122 and 157 cm.

♦ Score and snap.


## ACCESSORIES

<b>Dust collector 2 hp -included-</b>	02 12 06	<b>Compressor, 0.5 Hp -9 I-</b>	02 09 38	<b>Saw blade for aluminium</b>	14 03 22
<b>Laser</b>	14 20 06	<b>Compressor, 1 Hp -24 I-</b>	02 09 40	<b>Saw blade for wood</b>	14 03 30
<b>1 m arm extension</b>	14 20 02	<b>Compressor OS20P, 2 Hp -24 I-</b>	02 09 24	<b>Blades for pneu. cutter</b>	13 01 30
<b>Extra measure tab right</b>	45 11 11	<b>Compressor L20, 2 Hp -24 I-</b>	02 09 26	<b>Cutting wheels for glass **</b>	14 07 43
<b>Extra measure tab left</b>	45 11 75	<b>Universal saw blade</b>	14 03 70		
<b>Compressor, 1 Hp -6 I-</b>	02 09 44	<b>Saw blade for plastic</b>	14 03 60		

\*\* Only for Verdi 122 and 157 cm.

# Wincut Pneumatic Vertical Cutter

Technical Information	72 85 02 Wincut 160	72 85 04 Wincut 246	72 85 03 Wincut 305
<b>Operation</b>	Pneumatic	Pneumatic	Pneumatic
<b>Cutting head</b>	Pneumatic	Pneumatic	Pneumatic
<b>Max. cutting height</b>	160 cm / 63"	246 cm / 96"	305 cm / 120"
<b>Thicknesses allowed</b>	22 mm (1,5 - 3 mm glass)	22 mm (1,5 - 3 mm glass)	22 mm (1,5 - 3 mm glass)
<b>Dimensions</b>	239 x 192 x 50 cm	330 x 246 x 56 cm	386 x 246 x 62 cm
<b>Shipping dimensions A</b>	260 x 70 x 62 cm	410 x 70 62 cm	410 x 70 x 62 cm
<b>Weight shipping A</b>	95 Kg	152 Kg	184 Kg
<b>Shipping dimensions B</b>	174 x 106 x 9 cm	174 x 144 x 10	174 x 144 x 10 cm
<b>Weight shipping B</b>	25 Kg	30 Kg	34 Kg

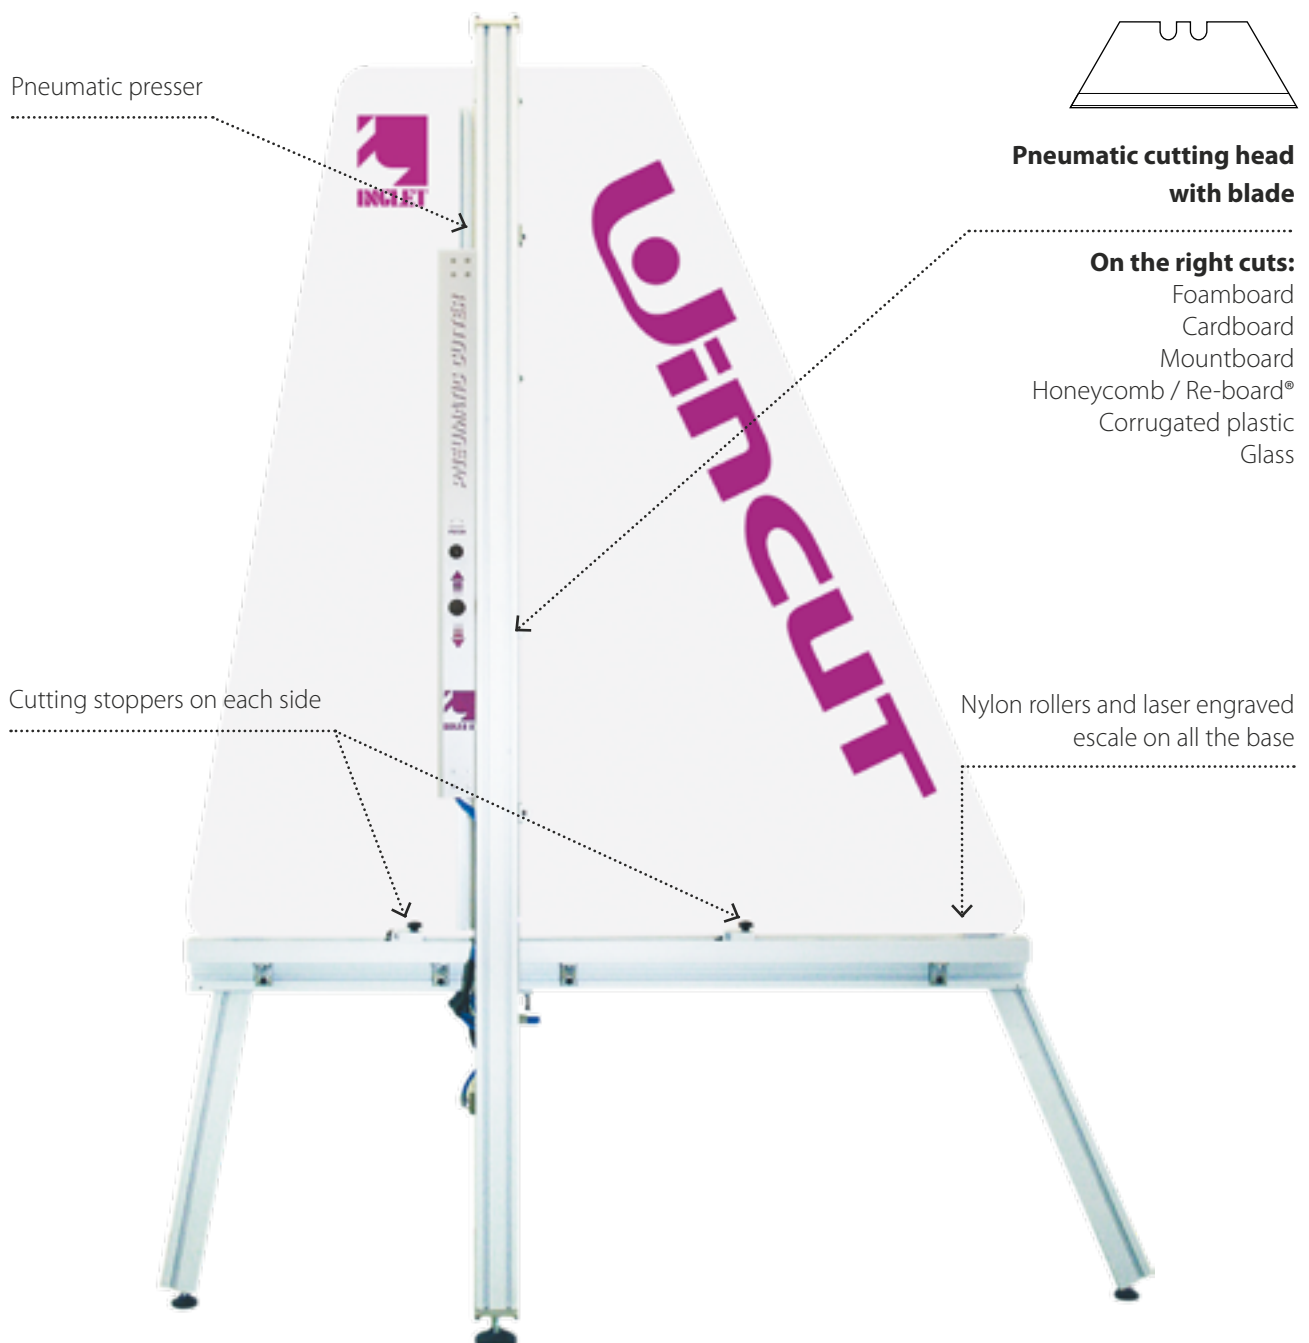



**The Wincut is a pneumatic wall mounted cutter** designed to cut specifically semi-rigid materials and also glass up to 305 cm. The movement of the cutting head is done through a pneumatic cylinder that guarantees a fast and smooth cut. The unit is also equipped with a pneumatic clamping system to strongly hold the material that needs to be cut.



**The Wincut comes standard equipped with two interchangeable cutting heads**, one to cut semi-rigid materials up to 20 mm using a special knife and a second one to cut glass up to 3 mm using a cutting wheel.

**Materials cut by the Wincut:** foamboard, cardboard, honeycomb / Re-board®, corrugated plastic, PVC, mountboard, glass...



**The Wincut is available in three different cutting sizes:** 160 cm (63"), 246 cm (96") & 305 cm (120").

**Different cutting heads available:**

Two different cutting heads available to cut semi-rigid materials and glass.

**Easy to operate:**

Pneumatic switch to quickly and easily activate the pneumatic knife.



**Pneumatic clamping system:**

Useful system to hold the material and with the possibility of regulating the pressure if it's required.

**Other features:**

- Equipped with nylon rollers on the base to easily move and handle large materials.
- Two measurement stops to accurately set up the desired measure to get.
- Easy to set up and square through the adjusting screw system.
- Laser system available as an accessory, useful to indicate the cutting line.

<b>RIGIDS</b>	<b>Max. thickness</b>	<b>SEMI-RIGIDS</b>	<b>Max. thickness</b>
<b>PVC Foamboard</b>	5 mm	<b>Foamboard</b>	20 mm
<b>Glass</b>	6 mm ♦	<b>Cardboard</b>	20 mm
		<b>Honeycomb / Re-board®</b>	13 mm
		<b>Corrugated plastic</b>	5 mm
		<b>Passepartout</b>	✓



♦ Score and snap.

**ACCESSORIES**

<b>Semi-rigid materials cutting head -Included-</b>	45 11 33
<b>Glass cutting head -Included-</b>	45 17 80
<b>Laser beam for cutting head</b>	14 20 06
<b>Arm extension with millimeter scale -1 m-</b>	14 20 02
<b>Extra mesure tab -right-</b>	45 11 11
<b>Extra mesure tab -left-</b>	45 11 75
<b>Trapezoidal blade -100 u-</b>	13 01 30
<b>Cutting wheels for glass</b>	14 07 43
<b>Compressor, 1 Hp -24 l-</b>	02 09 40
<b>Compressor OS20P, 2 Hp -24 l-</b>	02 09 24
<b>Compressor L20, 2 Hp -24 l-</b>	02 09 26

# Inblade Vertical Cutter

Technical Information	<b>728561</b> Inblade 165 cm	<b>72 85 62</b> Inblade 210 cm	<b>728563</b> Inblade 250 cm
<b>Cutting head operation</b>	Manual	Manual	Manual
<b>Clam system operation</b>	Pneumatic	Pneumatic	Pneumatic
<b>Cutting height</b>	165 cm / 65"	210 cm / 82"	250 cm / 98"
<b>Dimensions A x B x C</b>	225 x 210 x 56 cm 88,5 x 82 x 22"	268 x 210 x 56 cm 105 x 82 x 22"	310 x 210 x 56 cm 122 x 82 x 22"
<b>Weight</b>	70 Kg / 154 lb	84 Kg / 185 lb	102 kg / 224 lb
<b>Packing dimensions</b>	231 x 49 x 46 cm	278 x 49 x 46 cm	331 x 49 x 46 cm
<b>Packing weight</b>	94 Kg 105 Kg (with free standing)	114 Kg 126 Kg (with free standing)	130 Kg 144 Kg (with free standing)

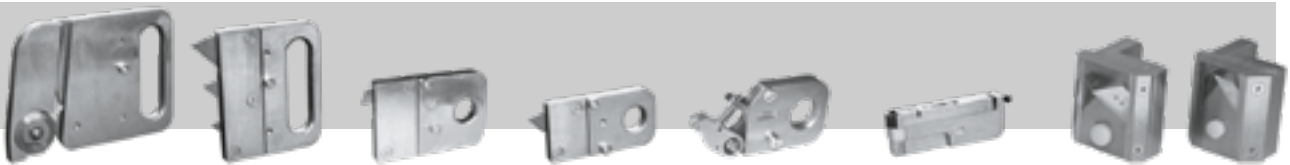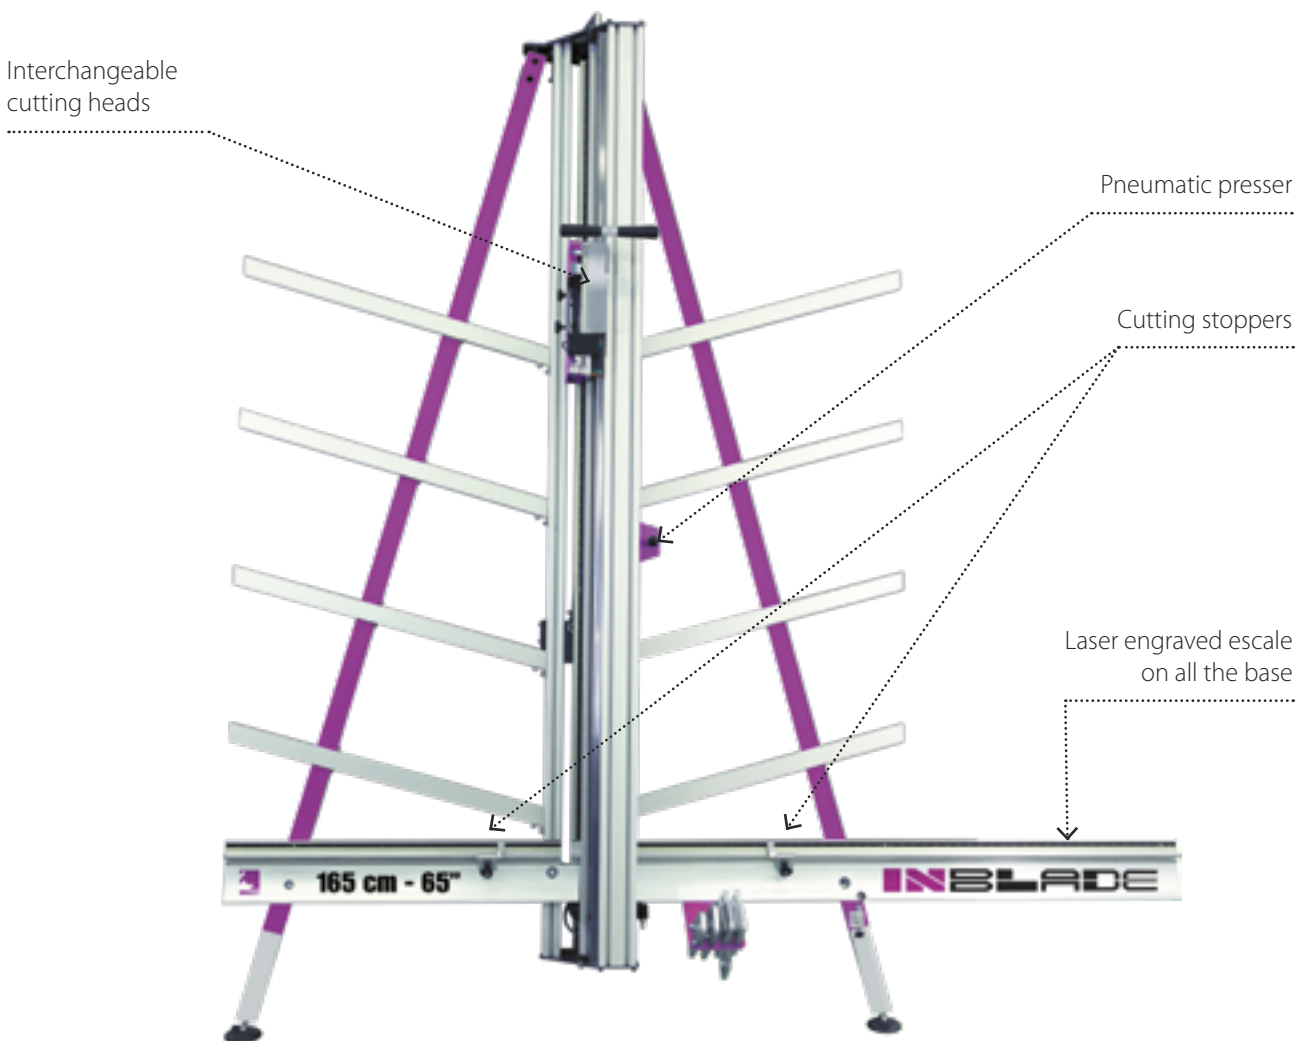

**ALUMINIUM COMPOSITE**  
Up to 4 mm  
-Included-  
Ref. 45 19 90

**TRIPLE BLADE**  
Up to 20 mm-  
-Accessory-  
Ref. 45 18 97

**ACRYLIC**  
Up to 6 mm  
-Accessory-  
Ref. 45 18 96

**SEMI-RIGIDS**  
Up to 13 mm  
-Included-  
Ref. 45 19 91

**GLASS**  
Up to 6 mm  
-Accessory-  
Ref. 45 18 99

**V-GROOVE RIGIDS**  
Up to 5 mm  
-Accessory-  
Ref. 45 18 98

**V-GROOVE SEMI-RIGIDS**  
Up to 20 mm  
-Accessory-  
Ref. 45 19 85 / 45 19 86  
+ 45 19 04

**The Inblade Vertical Cutter cuts all the rigid and semi-rigid materials** used in today's sign, frame and photo markets. The reliable linear bearing guide system combined with the robust structure guarantees an accurate and smooth cut of all the materials.

**The interchangeable cutting head system** offers an easy-to-use solution to hold all the available cutting heads and it is ready to be used by new tools developed in the future.



**It is available in three cutting sizes:** 165 cm (65"), 210 cm (82") & 250 cm (98") and it allows cutting the surprising maximum thickness of 20 mm.

**Includes:** cutting head for aluminium composites (up to 4 mm). Cutting head for semi-rigid materials (up to 13 mm).

**Accurate cutting head movement:** two bearing blocks located on a linear rail for a fast and accurate cutting head movement.

**Pneumatic clamping:** the pneumatic clamping system offers an easy, fast and reliable way to hold the material.

**Other features:** guided counterbalance supports the load of the cutting head to facilitate the work. Telescopic legs to find easily the most comfortable working position. Easy to set up and to square through the adjusting screw system. Can be mounted on the wall or supported by a free standing accessory.



RIGIDS	Max. thickness
PVC Foamboard	13 mm
Aluminium composite / Dibond®	4 mm
Aluminium sheets / Cromaluxe®	1 mm
MDF / Wood	4 mm
Acrylics / Plexiglas®	6 mm * / ♦
Glass	6 mm * / ♦

SEMI-RIGIDS	Max. thickness
Foamboard	13 mm / 20 mm *
Cardboard	13 mm / 20 mm *
Honeycomb / Re-board®	13 mm / 20 mm *
Corrugated plastic	13 mm
Passepartout	✓

V-GROOVE	Max. thickness
Aluminium composite / Dibond®	4 mm *
Honeycomb / Re-board®	20 mm *
Foamboard	13 mm *

\* Optional accessory required. ♦ Score and snap.


#### ACCESSORIES

Aluminium composites cutting head -Included-	45 19 90
Single blade cutting head -Included-	45 19 91
Acrylic cutting head	45 18 96
Triple blade cutting head	45 18 97
V-Groove cutting head	45 18 98
Glass cutting head	45 18 99
V-Groove cutting head support	45 19 04
Re-board® V-Groove cutting head	45 19 85
Foamboard V-Groove cutting head	45 19 86
Arm extension for Inblade -1 m-	14 20 08
Laser beam	45 06 51
Free standing Inblade, 165	45 18 01
Free standing Inblade, 210	45 18 02

Free standing Inblade, 250	45 19 13
Trapezoid blades -100 u-	13 01 30
Acrylic scoring blade -5 u-	13 01 25
V-Groove blade	13 01 71
Circular blade -2 u-	13 01 72
Re-board® V-Groove blades	13 01 79
Foamboard V-Groove blades	13 01 80
Glass cutting wheel	14 07 43
Compressor, 1 Hp -6 l-	02 09 44
Compressor, 0.5 Hp -9 l-	02 09 38
Compressor, 1 Hp -24 l-	02 09 40
Compressor OS20P, 2 Hp -24 l-	02 09 24
Compressor L20, 2 Hp -24 l-	02 09 26

## Inblade Pro Vertical Cutter

Technical Information	72 85 81 Inblade Pro 165	72 85 82 Inblade Pro 210	72 85 83 Inblade Pro 250	72 85 84 Inblade Pro 305
<b>Cutting head</b>	Pneumatic	Pneumatic	Pneumatic	Pneumatic
<b>Clam system</b>	Pneumatic	Pneumatic	Pneumatic	Pneumatic
<b>Max. cutting height</b>	165 cm / 65 "	210 cm / 82 "	250 cm / 98 "	305 cm / 120 "
<b>Dimensiones A x B x C</b>	225 x 210 x 56 cm 88,5 x 82 x 22 "	268 x 210 x 56 cm 105 x 82 x 22 "	310 x 210 x 56 cm 122 x 82 x 22 "	365 x 210 x 56 cm 143 x 82 x 22 "
<b>Weight</b>	70 Kg / 154 lb	85 Kg / 187 lb	104 Kg / 229 lb	128 Kg / 282 lb
<b>Packing dimensions</b>	231 x 49 x 46 cm	278 x 49 x 46 cm	331 x 49 x 46 cm	410 x 49 x 46 cm
<b>Packing weight</b>	94 Kg 105 Kg (+ free standing)	115 Kg 127 Kg (+ free standing)	134 Kg 148 Kg (+ free standing)	182 Kg 198 Kg (+ free standing)

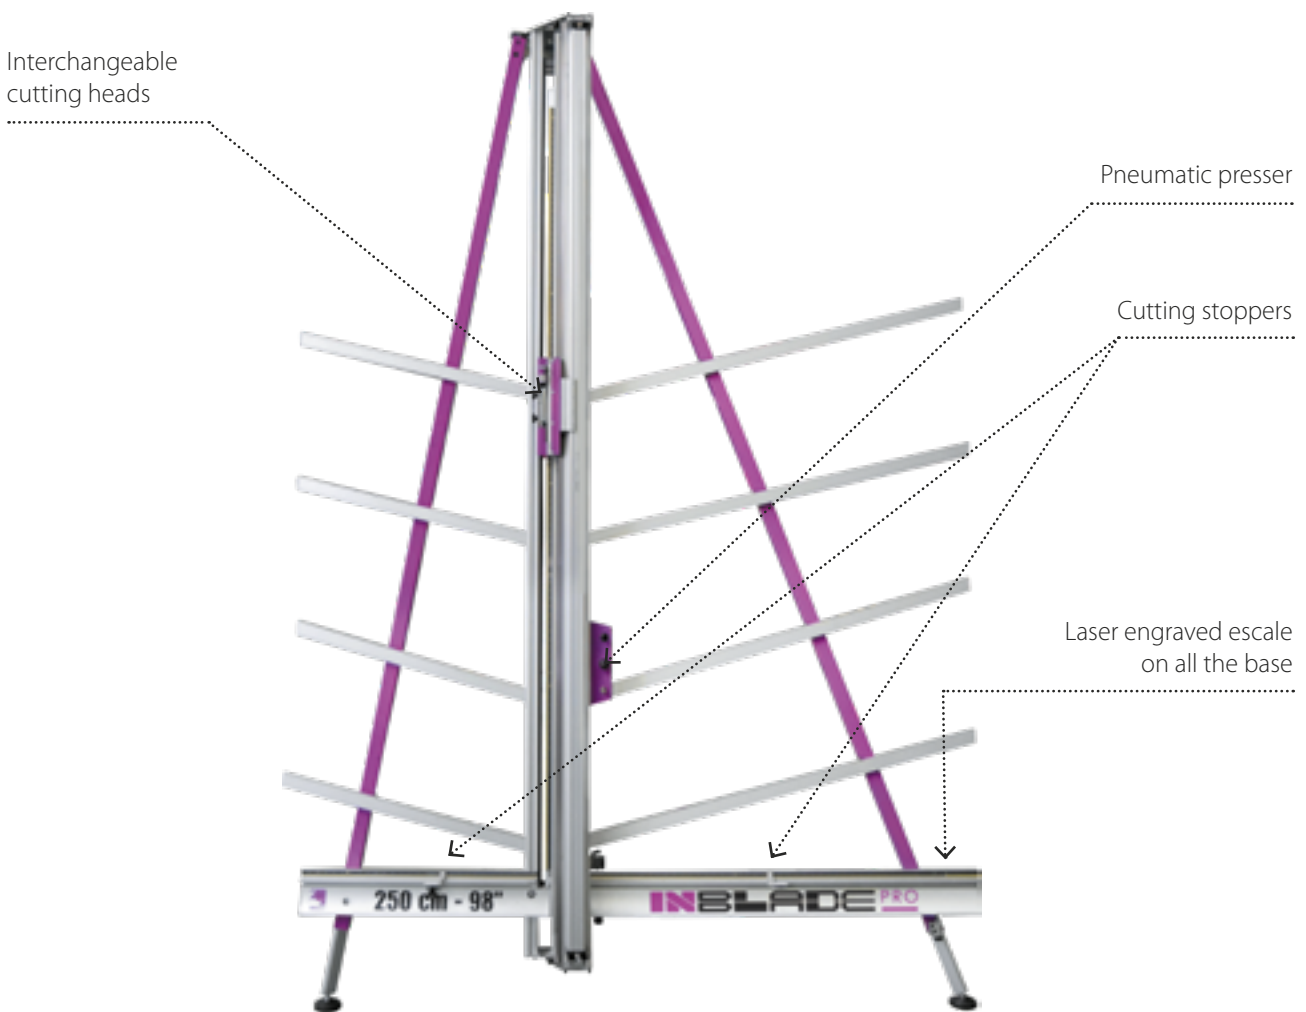

**ALUMINIUM COMPOSITE**  
Up to 4 mm  
-Included-  
Ref. 45 19 90



**TRIPLE BLADE**  
Up to 20 mm-  
-Accessory-  
Ref. 45 18 97



**ACRYLIC**  
Up to 6 mm  
-Accessory-  
Ref. 45 18 96




**SEMI-RIGIDS**  
Up to 13 mm  
-Included-  
Ref. 45 19 91



**GLASS**  
Up to 6 mm  
-Accessory-  
Ref. 45 18 99



**V-GROOVE RIGIDS**  
Up to 5 mm  
-Accessory-  
Ref. 45 18 98



**V-GROOVE SEMI-RIGIDS**  
Up to 20 mm  
-Accessory-  
Ref. 45 19 85 / 45 19 86  
+ 45 19 04

**The InBlade Pro** adds convenience to the already unique features of the InBlade thanks to the power of its pneumatic cylinder which, combined with a reliable linear slide guide system, moves the cutting head quickly and accurately, allowing any material to be cut without the need for manual pressure. It is also equipped with a control that regulates the speed of the cutting head according to the material to be cut, which guarantees a smooth cut for all uses. The interchangeable cutting head system offers an easy solution to work comfortably with all available cutting heads and is ready to be used by new tools developed in the future.

**It is available in four cutting sizes:** 165 cm (65"), 210 cm (82"), 250 cm (98") & 305 cm (120"). It allows cutting the surprising maximum thickness of 20 mm.


**Included:** Cutting head for aluminium composites (up to 4 mm). Cutting head for semi-rigid materials (up to 13 mm).

**Robust pneumatic cylinder:** To move the cutting head quickly and cut any material effortlessly.

**Two bearing supports:** On a linear sliding guide system for fast and precise cutting head movement.

**The pneumatic clamping system:** Offers an easy, fast and reliable way to hold the material. Speed control to regulate the cutting speed.

**Other features:** Interchangeable cutting head system. Laser to indicate the cutting line. Common for all tools. (Optional). Adjustable feet to easily find the most comfortable working position. Easy to install and square through the adjustment screw. Can be mounted on the wall or on a separate stand. • Puede ir montada en la pared o en un soporte independiente.



RIGIDS	Max. thickness
PVC Foamboard	13 mm
Aluminium composite / Dibond®	4 mm
Aluminium sheets / Cromaluxe®	1 mm
MDF / Wood	4 mm
Acrylics / Plexiglas®	6 mm * / ** / ◇
Glass	6 mm * / ◇

SEMI-RIGIDS	Max. thickness
Foamboard	13 mm / 20 mm *
Cardboard	13 mm / 20 mm *
Honeycomb / Re-board®	13 mm / 20 mm *
Corrugated plastic	13 mm
Passepartout	✓

#### ACCESSORIES

Aluminium composites cutting head -Included-	45 19 90
Single blade cutting head -Included-	45 19 91
Acrylic cutting head	45 18 96
Triple blade cutting head	45 18 97
V-Groove cutting head	45 18 98
Glass cutting head	45 18 99
V-Groove cutting head support	45 19 04
Re-board® V-Groove cutting head	45 19 85
Foamboard V-Groove cutting head	45 19 86
Arm extension for Inblade -1 m-	14 20 08
Laser beam	45 06 51
Free standing Inblade, 165	45 18 01
Free standing Inblade, 210	45 18 02



V-GROOVE	Max. thickness
Aluminium composite / Dibond®	4 mm *
Honeycomb / Re-board®	20 mm *
Foamboard	13 mm *

\* Optional accessory required. \*\* Possible but not for daily use.  
◇ Score and snap.


Free standing Inblade, 250	45 19 13
Free standing Inblade, 305	45 19 14
Trapezoid blades -100 u-	13 01 30
Acrylic scoring blade -5 u-	13 01 25
V-Groove blade	13 01 71
Circular blade -2 u-	13 01 72
Re-board® V-Groove blades	13 01 79
Foamboard V-Groove blades	13 01 80
Glass cutting wheel	14 07 43
Compressor, 1 Hp -24 l-	02 09 40
Compressor OS20P, 2 Hp -24 l-	02 09 24
Compressor L20, 2 Hp -24 l-	02 09 26

# Inbest Cutter Bar


Technical Information	72 68 02 Inbest Basic 110	72 68 03 Inbest Basic 160	72 68 04 Inbest Basic 210	72 68 05 Inbest Basic 260	72 68 06 Inbest Basic 320
<b>Cutting length</b>	110 cm / 44"	160 cm / 63"	210 cm / 82"	260 cm / 102"	320 cm / 126"
<b>Length (A)</b>	138 cm / 55"	188 cm / 74"	238 cm / 93"	288 cm / 113"	348 cm / 137"
<b>Width (B)</b>	15,8 cm / 6,22"				
<b>Weight</b>	9,2 kg / 20 lb	12 kg / 26,4 lb	14,8 kg / 32,6 lb	18 kg / 40 lb	21,7 kg / 47 lb
<b>Packing dimensions</b>	154 x 26 x 32 cm	204 x 26 x 32 cm	254 x 26 x 32	304 x 26 x 32 cm	364 x 26 x 32 cm
<b>Packing weight</b>	14 Kg	18 Kg	22,50 Kg	25,50 Kg	30 Kg

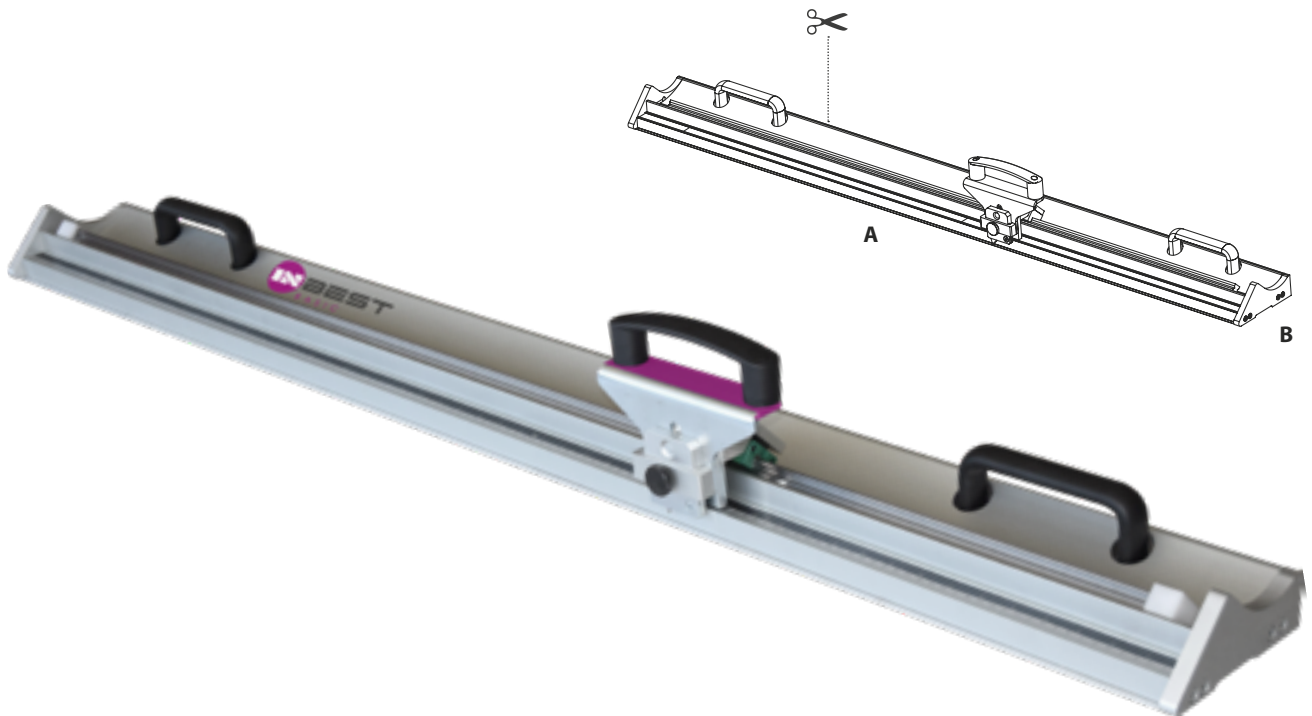


**SEMI-RIGIDS  
Cutting Head**  
Up to 13 mm  
(Included)  
Ref. 45 22 95




**CIRCULAR BLADE  
Cutting Head**  
Flexible materials  
(Included)  
Ref. 45 22 96



**ACRYLIC  
Cutting Head**  
Up to 4 mm  
(Accessory)  
Ref. 45 22 92



**REVERSE  
Cutting Head**  
Cut from right to left  
(Accessory)  
Ref. 45 22 93



**EXTRA BLADE  
Cutting Head**  
Up to 20 mm  
(Accessory)  
Ref. 45 22 94

**The new InBest range of cutter bars** has been developed and constructed to satisfy all cutting requirements of a wide range of graphic materials; covering from the most delicate flexible material to any semi-rigid material.

**The unique feature of using a linear bearing system to guide the cutting head** guarantees an excellent performance and extreme precision, unmatched by any other cutter in the market. The InBest Basic which is the entry-level model, is equipped with a useful and easy-to-use single cutting head holder. The cut requires a soft downward hand pressure.

**Includes:** cutting head for semi-rigids (up to 13 mm). **Ref. 45 22 95.** Circular blade for flexible materials (up to 4 mm). **Ref. 45 22 96.**


**All InBest models are available in five different sizes:**  
110 cm (44"), 160 cm (63"), 210 cm (82"), 260 cm (102") and 320 cm (126").

**Linear bearing system:** the combination of the robust bearing block with the steel linear rail, which is common to all InBest cutters, guarantees an accurate and smooth cutting head movement.

**Interchangeable cutting heads:** easy system to quickly interchange the cutting head to use, while the attached handle ensures an extra comfort.

**Table mount elevator:** available for InBest Basic and InBest Twin to offer an easy operation, raising the cutter above the material for positioning the cutting line.

**Other features:** User-friendly machine easy and simply to install. Plastic strip for sight line to visualize the cutting line and avoid guesswork need. Cutting thickness up to 20 mm for semi-rigid materials. Dust free operation to safely work close to printers.



RIGIDS	Max. Thickness
PVC Foamboard	5 mm / 10 mm **
Acrylics / Plexiglas®	4 mm * / ◇
SEMI-RIGIDS	Max. Thickness
Foamboard	13 mm / 20 mm *
Cardboard	13 mm / 20 mm *
Honeycomb / Re-board®	13 mm / 20 mm *
Corrugated plastic	13 mm
Passepartout	✓

FLEXIBLES	Max. Thickness
Fabric / Textiles	✓
Plastic film	✓
Banner materials	✓
Paper	✓
Vinyl	✓
Magnetic sheets	✓

\* Optional accessory required. \*\* The Pro model allows cutting without any problems. In the Basic and Twin models it is possible, but not for daily use. ◇ Score and snap.



#### ACCESSORIES

Semi-rigids cutting head (included)	45 22 95
Circular blade cutting head (included)	45 22 96
Acrylic cutting head	45 22 92
Reverse cutting head	45 22 93
Extra blade cutting head	45 22 94
Table mount elevator for InBest Basic & Twin (1 set)	45 22 01
Trapezoid blades -100 u-	13 01 30
Circular blade -1 u-	13 01 26
Acrylic scoring blade -5 u-	13 01 47



## Inbest Twin Cutter Bar


Technical Information	72 68 12 Inbest Twin 110	72 68 13 Inbest Twin 160	72 68 14 Inbest Twin 210	72 68 15 Inbest Twin 260	72 68 16 Inbest Twin 320
<b>Cutting length</b>	110 cm / 44"	160 cm / 63"	210 cm / 82"	260 cm / 102"	320 cm / 126"
<b>Length (A)</b>	138 cm / 55"	188 cm / 74"	238 cm / 93"	288 cm / 113"	348 cm / 137"
<b>Width (B)</b>	15,8 cm / 6,22"				
<b>Weight</b>	9,8 kg / 21,6 lb	12,6 kg / 28 lb	15,4 kg / 34 lb	18,6 kg / 41 lb	26,5 kg / 57 lb
<b>Packing dimensions</b>	154 x 26 x 32 cm	204 x 26 x 32 cm	254 x 26 x 32	304 x 26 x 32 cm	364 x 26 x 32 cm
<b>Packing weight</b>	14,50 Kg	18,50 Kg	23 Kg	26 Kg	30,50 Kg

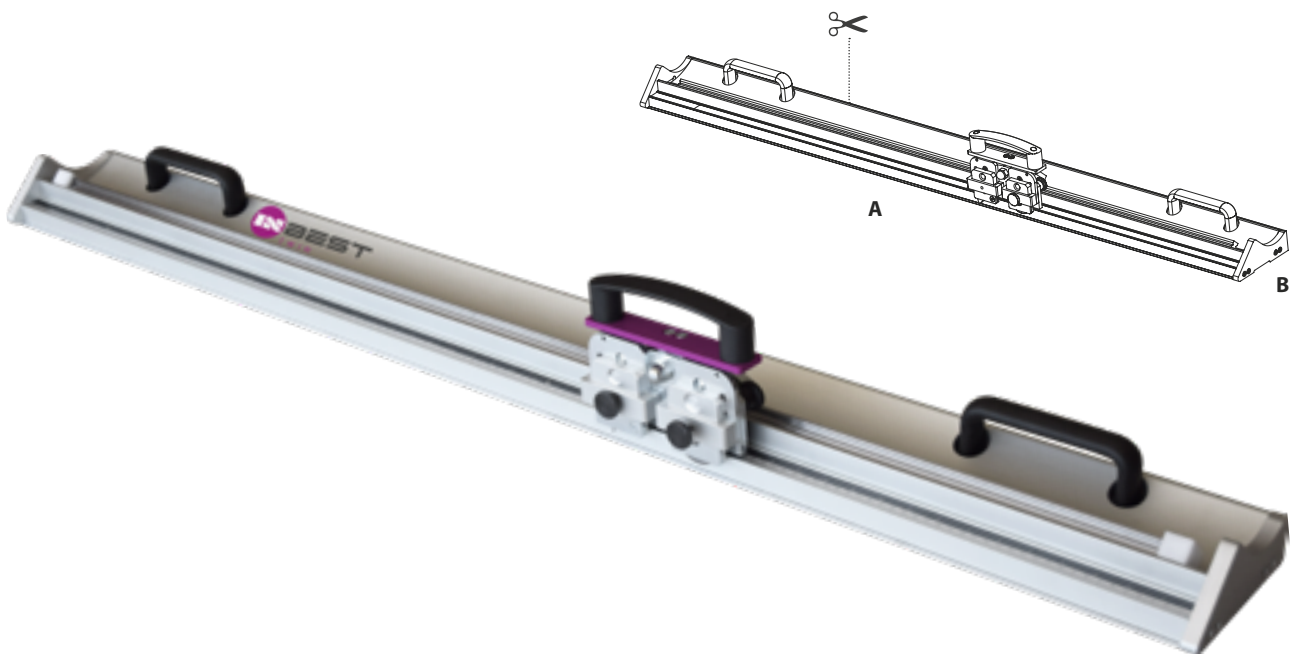

### SEMI-RIGIDS Cutting Head

Up to 13 mm  
(Included)


Ref. 45 22 95



### CIRCULAR BLADE Cutting Head

Flexible materials  
(Included)


Ref. 45 22 96



### ACRYLIC Cutting Head

Up to 4 mm  
(Accessory)


Ref. 45 22 92



### REVERSE Cutting Head

Cut from right to left  
(Accessory)

Ref. 45 22 93



### EXTRA BLADE Cutting Head

Up to 20 mm  
(Accessory)

Ref. 45 22 94



**The new InBest range of cutter bars** has been developed and constructed to satisfy all cutting requirements of a wide range of graphic materials; covering from the most delicate flexible material to any semi-rigid material.

**The unique feature of using a linear bearing system** to guide the cutting head guarantees an excellent performance and extreme precision, unmatched by any other cutter in the market.

**The InBest Twin features a revolutionary dual cutting head system** to allow the customer to have two different cutting heads installed at one time and block them if required. **The different cutting heads available** provide the equipment with a great versatility and productivity.

**Includes:** cutting head for semi-rigids (up to 13 mm). **Ref. 45 22 95.** Circular blade for flexible materials (up to 4 mm). **Ref. 45 22 96.**

**All InBest models are available in five different sizes:**

110 cm (44"), 160 cm (63"), 210 cm (82"), 260 cm (102") and 320 cm (126").


**Linear bearing system:** the combination of the robust bearing block with the steel linear rail, which is common to all InBest cutters, guarantees an accurate and smooth cutting head movement.

**Ergonomic handle system:** ergonomic handle system to comfortably cut in both directions.

**Blocking the blade:** possibility of blocking the blade at the cutting position to facilitate the cut of big sizes. No need of downward hand pressure.

**Table mount elevator:** available for InBest Basic and InBest Twin to offer an easy operation, raising the cutter above the material for positioning the cutting line.

**Other features:** user-friendly machine easy and simply to install. Plastic strip for sight line to visualize the cutting line and avoid guesswork need. Cutting thickness up to 20 mm for semi-rigid materials. Dust free operation to safely work close to printers.



RIGIDS	Max. Thickness
PVC Foamboard	5 mm / 10 mm **
Acrylics / Plexiglas®	4 mm * / ◇
SEMI-RIGIDS	Max. Thickness
Foamboard	13 mm / 20 mm *
Cardboard	13 mm / 20 mm *
Honeycomb / Re-board®	13 mm / 20 mm *
Corrugated plastic	13 mm
Passepartout	✓

FLEXIBLES	Max. Thickness
Fabric / Textiles	✓
Plastic film	✓
Banner materials	✓
Paper	✓
Vinyl	✓
Magnetic sheets	✓


\* Optional accessory required. \*\* The Pro model allows cutting without any problems. In the Basic and Twin models it is possible, but not for daily use. ◇ Score and snap.

#### ACCESSORIES

Semi-rigids cutting head (included)	45 22 95
Circular blade cutting head (included)	45 22 96
Acrylic cutting head	45 22 92
Reverse cutting head	45 22 93
Extra blade cutting head	45 22 94
Table mount elevator for InBest Basic & Twin (1 set)	45 22 01
Trapezoid blades -100 u-	13 01 30
Circular blade -1 u-	13 01 26
Acrylic scoring blade -5 u-	13 01 47

# Inbest Pro Cutter Bar

Technical Information	72 68 22 Inbest Pro 110	72 68 23 Inbest Pro 160	72 68 24 Inbest Pro 210	72 68 25 Inbest Pro 260	72 68 26 Inbest Pro 320
<b>Cutting Length</b>	110 cm / 44"	160 cm / 63"	210 cm / 82"	260 cm / 102"	320 cm / 122"
<b>Length (A)</b>	146 cm / 58"	196 cm / 77"	246 cm / 96"	296 cm / 116"	356 cm / 140"
<b>Width (B)</b>	22,5 cm / 8,86"				
<b>Weight</b>	16 kg / 35 lb	20,5 Kg / 45 lb	26 kg / 57 lb	32 kg / 70.5 lb	45,7 kg / 99 lb
<b>Packing dimensions</b>	154 x 26 x 32 cm	204 x 26 x 32 cm	254 x 26 x 32 cm	304 x 26 x 32 cm	364 x 26 x 32 cm
<b>Packing weight</b>	20 Kg	26 Kg	31 Kg	38 Kg	45 kg

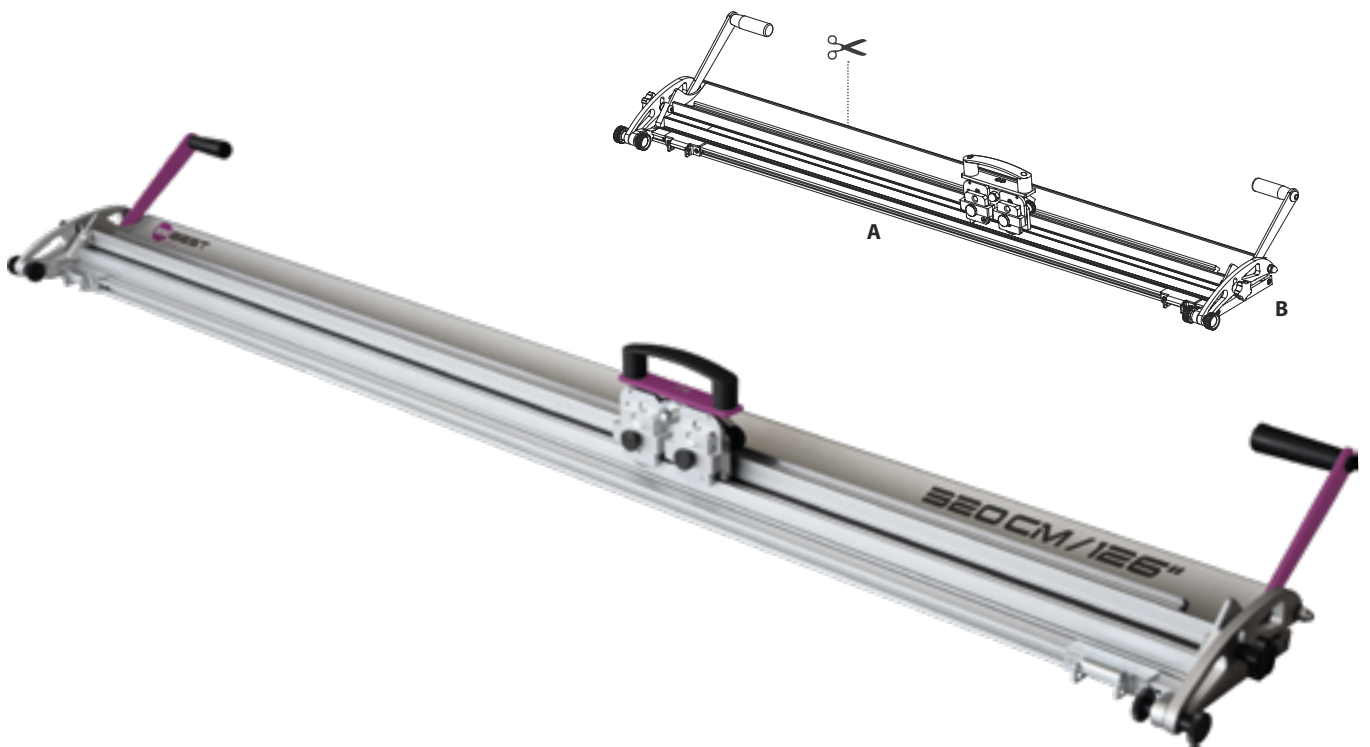

### SEMI-RIGIDS Cutting Head

Up to 13 mm  
(Included)

Ref. 45 22 95



### CIRCULAR BLADE Cutting Head

Flexible materials  
(Included)

Ref. 45 22 96



### ACRYLIC Cutting Head

Up to 4 mm  
(Accessory)


Ref. 45 22 92



### REVERSE Cutting Head

Cut from right to left  
(Accessory)

Ref. 45 22 93




### EXTRA BLADE Cutting Head

Up to 20 mm  
(Accessory)

Ref. 45 22 94

**The new InBest range of cutter bars** has been developed and constructed to satisfy all cutting requirements of a wide range of graphic materials; covering from the most delicate flexible material to any semi-rigid material.

**The unique feature of using a linear bearing system** to guide the cutting head guarantees an excellent performance and extreme precision, unmatched by any other cutter in the market. The combination of the robust bearing block with the steel linear rail, which is common to all InBest cutters, guarantees an accurate and smooth cutting head movement.



**The InBest Pro adds to the equipment an integrated aluminum base** with two different cutting tracks: one with a narrow groove for general purposes, to be used with the knife blade; and other with a built-in cutting strip, to be used with the circular blade.



**The InBest Pro is also equipped with an integral lift and hold mechanism**, which can be used from both sides, to facilitate the material loading.

**Includes:** cutting head for semi-rigids (up to 13 mm). **Ref. 45 22 95.** Circular blade for flexible materials (up to 4 mm). **Ref. 45 22 96.**

**All InBest models are available in five different sizes:** 110 cm (44"), 160 cm (63"), 210 cm (82"), 260 cm (102") and 320 cm (126").

**Ergonomic handle system:** ergonomic handle system to comfortably cut in both directions.



**Blocking the blade:** possibility of blocking the blade at the cutting position to facilitate the cut of big sizes. no need of downward hand pressure.

**Interchangeable cutting track:** cutting position easily changeable in few seconds through the quick knob system.

**Free working area:** cutter bar can be placed vertically on the side of the bench to free the working area if required.



**Other features:** user-friendly machine easy and simply to install. Plastic strip for sight line to visualize the cutting line and avoid guesswork need. Both the cutter and the aluminum base are equipped with full length grip strips to aid clamping and protect printed media. Cutting thickness up to 20 mm for semi-rigid materials. Dust free operation to safely work close to printers.

RIGIDS	Max. Thickness
PVC Foamboard	10 mm
Acrylics / Plexiglas®	4 mm * /◇
SEMI-RIGIDS	Max. Thickness
Foamboard	13 mm / 20 mm *
Cardboard	13 mm / 20 mm *
Honeycomb / Re-board®	13 mm / 20 mm *
Corrugated plastic	13 mm
Passepartout	✓

FLEXIBLES	Max. Thickness
Fabric / Textiles	✓
Plastic film	✓
Banner materials	✓
Paper	✓
Vinyl	✓
Magnetic sheets	✓

\* Optional accessory required. ◇ Score and snap.

ACCESSORIES	
Semi-rigids cutting head (included)	45 22 95
Circular blade cutting head (included)	45 22 96
Acrylic cutting head	45 22 92
Reverse cutting head	45 22 93
Extra blade cutting head	45 22 94
Trapezoid blades -100 u-	13 01 30
Circular blade -1 u-	13 01 26
Acrylic scoring blade -5 u-	13 01 47

Table for Inbest Pro, 110 cm	14 22 02
Table for Inbest Pro, 160 cm	14 22 03
Table for Inbest Pro, 210 cm	14 22 04
Table for Inbest Pro, 260 cm	14 22 05
Table for Inbest Pro, 320 cm	14 22 06



**02 09 44** NUAIR SILENT COMPRESSOR, 1 HP -6 litres-

**Oil-free piston compressor, lightweight, practical and quiet**, ideal for all those applications that require silence and ease of transport. Suction cup feet, which ensure optimum stability. Head unit with low speed motor, extremely silent: 66dB(A).

**Technical Information**

<b>Engine</b>	1 Hp
<b>Litres</b>	6
<b>Bar</b>	8
<b>dB</b>	66



**02 09 38** BAMBI SILENT COMPRESSOR, 0.5 HP -9 l-

**Quiet compressor with ultra-low noise and relatively small air flow.** Sound levels as low as 40 dB and almost no vibration during operation. Minimal maintenance and years of trouble-free use.

- Internally coated air receptor.
- Clearview oil level control.
- Easy to use oil filling cap.
- Outlet filter 10 microns and adjustable pressure regulation.

**Technical Information**

<b>L/min</b>	50
<b>Litres</b>	9
<b>Bar</b>	8
<b>Kw / Hp</b>	0,34 / 0,5
<b>dB</b>	40
<b>Dimensions</b>	47 x 34 x 34 cm



**02 09 40** BAMBI SILENCE COMPRESSOR, 1 HP -24 litres-

**02 09 42** BAMBI SILENCE COMPRESSOR, 1 HP -50 litres-

**Quiet compressor with ultra-low noise and relatively small air flow.** Sound levels as low as 40 dB and almost no vibration during operation. Minimal maintenance and years of trouble-free use.

- Internally coated air receptor.
- Clearview oil level control.
- Easy to use oil filling cap.
- Outlet filter 10 microns and adjustable pressure regulation.

**Technical Information**

	<b>02 09 40</b>	<b>02 09 42</b>
<b>L/min</b>	100	100
<b>Litres</b>	24	50
<b>Bar</b>	8	8
<b>Kw / Hp</b>	0,68 / 1,0	0,68 / 1,0
<b>Volts / Hz</b>	220-240 / 50	220-240 / 50
<b>dB</b>	42	42
<b>Kg</b>	31	46
<b>Dimensions</b>	49 x 65 x 25 cm	55 x 88 x 29 cm

**02 09 24** ABAC OS20P POLE POSITION COMPRESSOR, 2 Hp 220V -24l-

The **ABAC OS Pole Position** is designed to quietly support you in all your activities. High performance with a **silent and oil-free pump**. Easy to transport and place wherever you need it, you can always rely on its performance, with a noise level of only 59 dB(A), equivalent to a quiet conversation with a friend.

**Technical Information**

<b>Litres:</b>	24
<b>l/min:</b>	230
<b>Oil:</b>	no oil
<b>Hp:</b>	2
<b>kW:</b>	1,5
<b>rpm:</b>	1420
<b>Volt:</b>	230/50/1
<b>Bar:</b>	9
<b>dB (A):</b>	59
<b>Dimensions:</b>	616 x 300 x 574 mm.
<b>Kg:</b>	24



**02 09 26** ABAC L20 POLE POSITION COMPRESSOR , 2 Hp 220V -24l-

**Direct drive lubricated compressor.** Excellent technology and simple operation, suitable for a wide range of applications, from nailing nails or installing staples to blowing and inflation work.

**Technical Information**

<b>Litres:</b>	24
<b>l/min:</b>	220
<b>Oil:</b>	Lubricated
<b>Hp:</b>	2
<b>kW:</b>	1,5
<b>rpm: 2850.</b>	2850
<b>Volt: 230 / 50 / 1.</b>	23 / 50 / 1
<b>Bar: 10.</b>	10
<b>dB (A):</b>	70
<b>Dimensions:</b>	610 x 310 x 580 mm
<b>Kg:</b>	25



**02 12 06** INTEC DUST COLLECTOR, 2 HP

Mobile dust collector with a storage bag. **Tube and clamps not included.**

**Technical Information**

<b>Main engine power</b>	2 Hp
<b>Number of suction nozzles</b>	2 suction nozzles with a diameter of 100 mm
<b>Suction flow rate</b>	42,15 cubic m / min
<b>Fan diameter</b>	360 mm
<b>Filtration bag diameter</b>	500 mm
<b>Storage bag diameter</b>	500 mm
<b>External measurements</b>	1000 x 750 x 2000 mm
<b>Packing dimensions</b>	920 x 580 x 580 mm
<b>Net weight</b>	47 Kg
<b>Voltage</b>	220 V






## WHAT DO YOU NEED TO CUT?

Compare our cutter machines here!

CUTTING SYSTEM	Verdi BASIC		Verdi TWIN		Verdi W
	SAW	SAW	BLADE	INTERCH	
<b>RIGIDS</b>					
PVC Foamboard	20 mm	20 mm	5 mm		5
Aluminium composite / Dibond®	12 mm	12 mm	-		
Aluminium sheets / ChromaLuxe®	3 mm	3 mm	-		
Acrylics / Plexiglas®	12 mm	12 mm	-		
MDF / Wood	20 mm	20 mm	-		
Glass	-	-	6 mm* / ◇		6
<b>SEMI-RIGIDS</b>					
Foamboard	-	-	20 mm		20
Cardboard	-	-	20 mm		20
Honeycomb / Re-board®	-	20 mm			13
Corrugated plastic	20 mm	20 mm	5 mm		5
Passepartout	-	-	✓		
<b>FLEXIBLES</b>					
Fabric / Textiles			-		
Plastic film			-		
Banner materials			-		
Paper			-		
Vinyl			-		
Magnetic sheets			-		
<b>V-GROOVE</b>					
Aluminium composite / Dibond®			-		
Honeycomb / Re-board®			-		
Foamboard			-		
<b>MAXIMUM CUTTING CAPACITY</b>	305 cm high				305

\* Optional accessory required. \*\* Possible but not for daily use. ◇ Score and snap.

Incut	Inblade	Inblade PRO	Inbest BASIC	Inbest TWIN	Inbest PRO
MAN. HEADS	INTERCHANGEABLE HEADS		INTERCHANGEABLE HEADS		
13 mm	13 mm		5 mm / 10 mm **		10 mm
-	4 mm		-		
-	1 mm		-		
-	6 mm * / $\diamond$	6 mm * / ** / $\diamond$	4 mm * / $\diamond$		
-	4 mm		-		
6 mm $\diamond$	6 mm * / $\diamond$		-		
13 mm	13 mm / 20 mm *		13 mm / 20 mm *		
10 mm	13 mm / 20 mm *		13 mm / 20 mm *		
13 mm	13 mm / 20 mm *		13 mm / 20 mm *		
13 mm	13 mm		13 mm		
✓	✓		✓		
-	-		✓		
-	-		✓		
-	-		✓		
-	-		✓		
-	-		✓		
-	-		✓		
-	4 mm *		-		
-	20 mm *		-		
-	13 mm *		-		
250 cm high	250 cm high	305 cm high	320 cm wide		

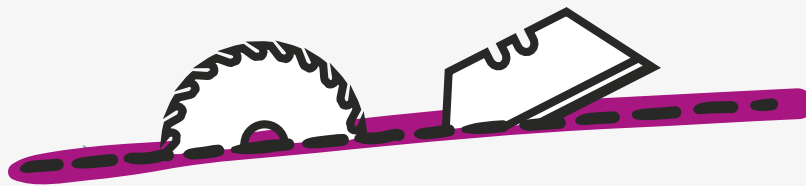

CUTTING SOLUTIONS



**INGLET, SLU** Av. Cervera, 21 • E25300 TÀRREGA Tel. +34 973 312 312 • Fax +34 973 310 755 • Whatsapp 607 662 285  
export@inglet.com • www.inglet.com • www.ingletmachinery.com • www.ingletledframes.com

06/09/2023